

**COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001 =**




Hydromix

Carbonato idrato di magnesio. Ritardante di fiamma per materie plastiche ed elastomeri.



Natural hydroxide magnesium carbonate. Flame retardant filler in thermoplastic, thermosetting and rubber compound.

Distribuzione granulometrica / particle size distribution

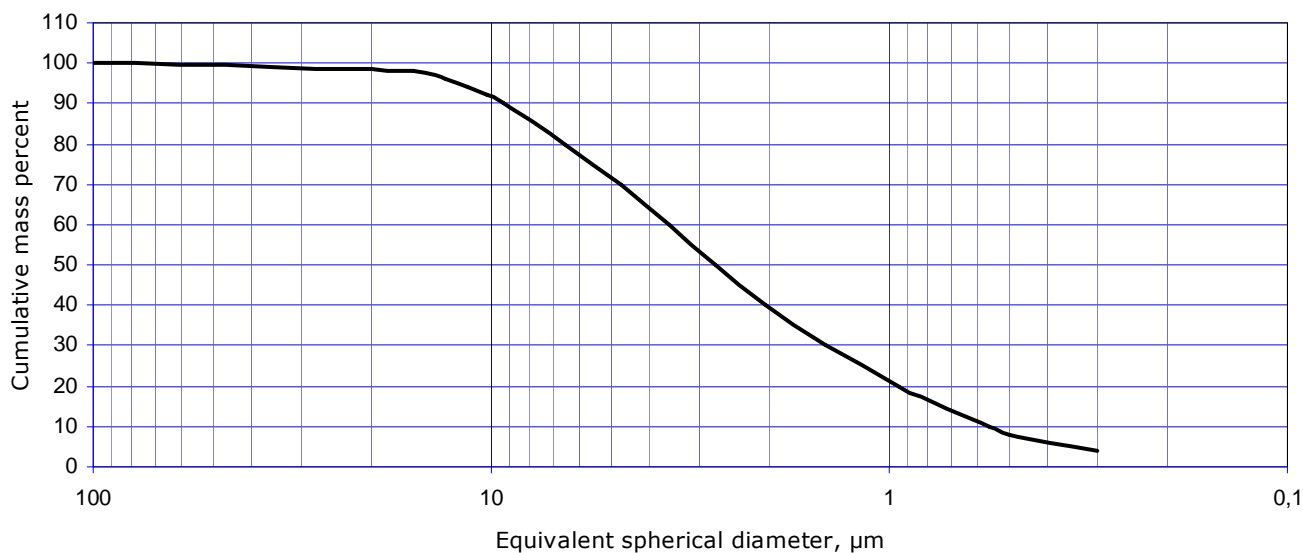

Caratteristiche fisiche / Physical characteristics	Valori / Values	Metodo di prova / Test method
Peso specifico / Specific gravity	2,65	ISO 787/10
Densità apparente / Bulk density (untamped)	0,55 g/cm ³	DIN 1060
Densità apparente per costipazione / Bulk density (tamped)	0,68 g/cm ³	ISO 787/11
Superficie specifica B.E.T. / Surface area B.E.T.	8 m ² /g	GEMINI VII Micromeritics
Umidità / Moisture	0,35%	ISO 787/2
Residuo alla setacciatura (44 μm) / Sieving residue(44 μm)	0,01%	ISO 787/7

Valori tipici / typical values

E' consigliato l'uso del prodotto entro 90 giorni dalla data di consegna. / Best before 90 days from the delivery date